ENIGMA USER MANUAL

HYUNDAI ELANTRA NEC DASH V1

DASHBOARD PHOTO:

REQUIRED CABLE(s): C15





FOLLOW THIS INSTRUCTION STEP BY STEP:

- 1. Remove the dashboard and open it carefully.
- 2. Remove the back side of the dash to get to the main board and identify it.
- 3. Solder cable C15 to the points as shown on PHOTO1.
- 4. Make sure that the connection you made is secure.
- 5. Use the EDITOR to save memory backup data.
- 6. Press the READ KM button and check if the value shown on the screen is correct.
- 7. Now you can use the CHANGE KM function.

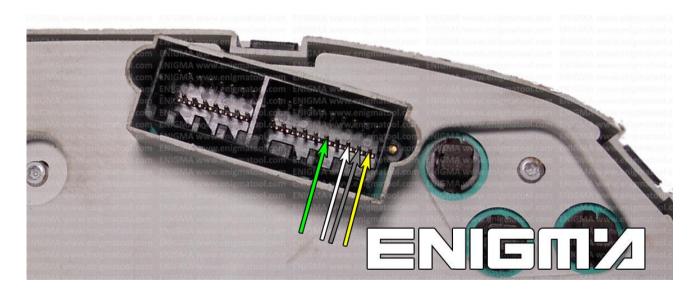


PHOTO 1: Solder cables according to the colors like shown on the photo above.



ENIGMA USER MANUAL

HYUNDAI ELANTRA NEC DASH V1

LEGAL DISCLAIMER:

DIAGCAR ELECTRONICS S.L. does not take any legal responsibility of illegal use of any information stored in this document. Copying, distributing or taking any action in reliance with the content of this information is strictly prohibited.

FOR MORE INFORMATION

Call 0034 983 359 787 or visit www.enigmatool.com

DIAGCAR ELECTRONICS S.L. Ebanistería 1A1 47610 Zaratán Spain

