AUDI A5


VERSION 1:



USE CABLE C46, REMOVE DASH FROM CAR AND OPEN BACK PLASTIC COVER. CONNECT POWER PLUG. NOW LOCATE POINTS ON THE BOARD LIKE IN PHOTO BELOW AND SOLDER CABLE LEADS AS IT SHOWS TO US: REMEMBER TO REMOVE RESISTOR. LATER YOU MUST RESTORE IT



MAKE BRIDGE BETWEEN THESE 2 POINTS, LIKE IN PHOTO:

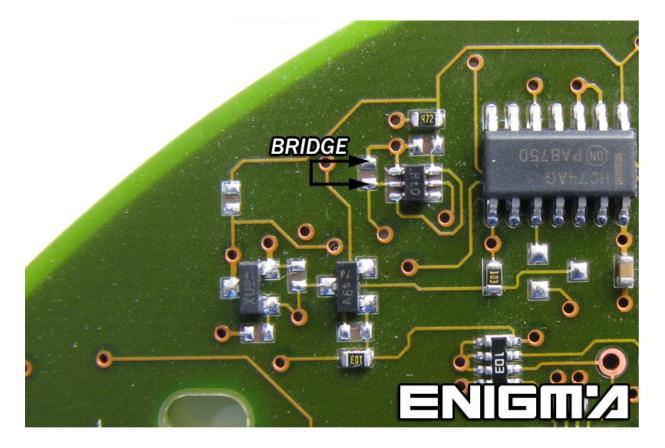

USE CABLE C46, REMOVE DASH FROM CAR AND OPEN BACK PLASTIC COVER. CONNECT POWER PLUG. NOW LOCATE POINTS ON THE BOARD LIKE IN PHOTO BELOW AND SOLDER CABLE LEADS AS IT SHOWS TO US:

REMEMBER TO REMOVE RESISTOR. LATER YOU MUST RESTORE IT

