

# ENIGMA USER MANUAL

## ALFA ROMEO GTV

### DASHBOARD PHOTO:




### REQUIRED CABLE(s):

#### C11



### FOLLOW THIS INSTRUCTION STEP BY STEP:

1. Remove the dashboard and open it carefully.
2. Remove the back side of the dash to get to the main board.
3. First lift up PINS as shown on the PHOTO1 and solder the **violet** cable.  
Remember to put the PINS that you lift back to their place when you finish.
4. Make sure that the connection you made is secure.
5. Solder cables according to colors as shown on PHOTO 2.
6. Make sure that the connection you made is secure.
7. Press the READ EEP button and save memory backup data.
8. Press the READ KM button and check if the value shown on the screen is correct.
9. Now you can use the CHANGE KM function.

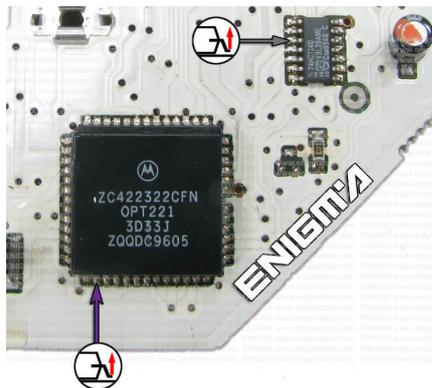

**PHOTO 1:** Solder cable and lift PINS like shown on the photo above.


FOR MORE INFORMATION

Call **0034 983 359 787** or visit **[www.enigmatool.com](http://www.enigmatool.com)**

DIAGCARELECTRONICS S.L. Ebanistería 1A, 47610 Zaratán, Spain

# ENIGMA USER MANUAL

## ALFA ROMEO GTV

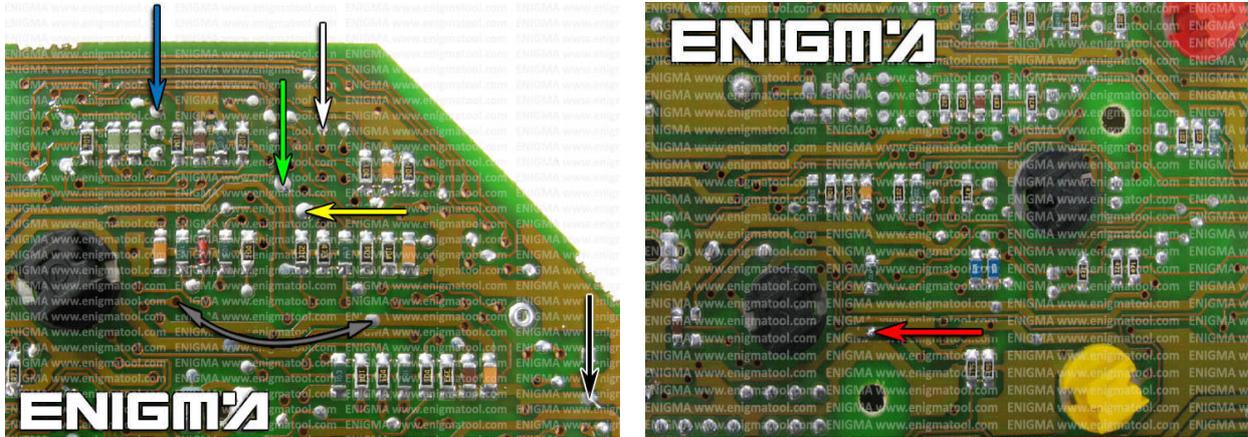

**PHOTO 2: Solder cables according to the colors like shown on the photos above.**

### **LEGAL DISCLAIMER:**

**DIAGCAR ELECTRONICS S.L. does not take any legal responsibility of illegal use of any information stored in this document. Copying, distributing or taking any action in reliance with the content of this information is strictly prohibited.**

FOR MORE INFORMATION

Call **0034 983 359 787** or visit [www.enigmatool.com](http://www.enigmatool.com)

DIAGCARELECTRONICS S.L. Ebanistería 1A, 47610 Zaratán, Spain

