

ENIGMA USER MANUAL

JEEP CHEROKEE 99' - 01' DASH

DASHBOARD PHOTO:



REQUIRED CABLE(S): C29 + A7



FOLLOW THIS INSTRUCTION STEP BY STEP:

1. Remove the dashboard, open it and locate the plug on the backside.
2. Connect the dash using C29 cable like shown on PHOTO1.
3. Make sure that you connected the C29 cables correctly.
4. Press the READ EEP button and save the memory backup data.
5. Press the READ KM button and check if the value shown on the screen is correct.
6. Now you can use the CHANGE KM function.

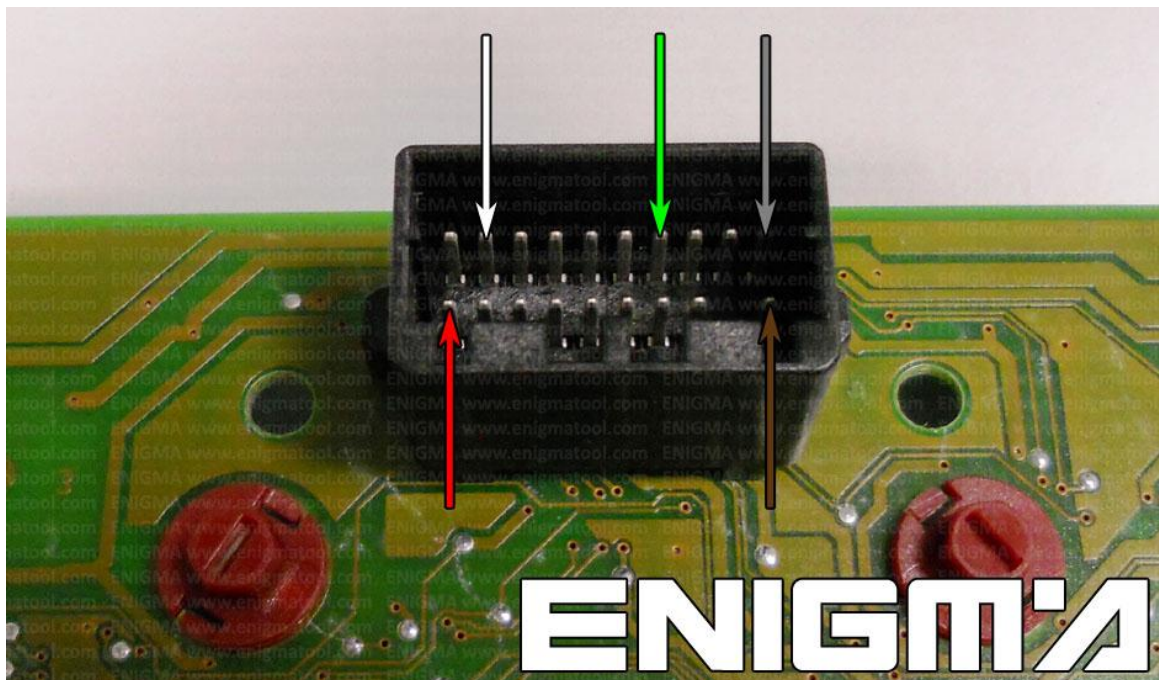


PHOTO 1: Connect C29 cables according to the picture above.

FOR MORE INFORMATION

Call **0034 983 359 787** or visit www.enigmatool.com

DIAGCARELECTRONICS S.L. Ebanistería 1A, 47610 Zaratán, Spain


Electronics
Diagcar S.L.

ENIGMA USER MANUAL
JEEP CHEROKEE 99' - 01' DASH

LEGAL DISCLAIMER:

DIAGCAR ELECTRONICS S.L. does not take any legal responsibility of illegal use of any information stored in this document. Copying, distributing or taking any action in reliance with the content of this information is strictly prohibited.

FOR MORE INFORMATION

Call **0034 983 359 787** or visit **www.enigmatool.com**

DIAGCAR ELECTRONICS S.L. Ebanistería 1A, 47610 Zaratán, Spain

