


PIASINI engineering

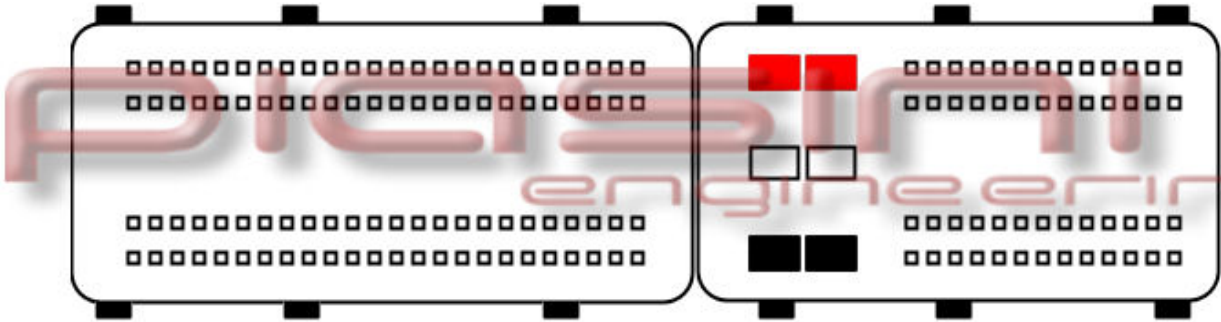

Connect as below:


Serial Suite:

ECU Plug:


Red
Black

to
to

2 Pins Red (Power Supply +12 Volt)
2 Pins Black (Ground)



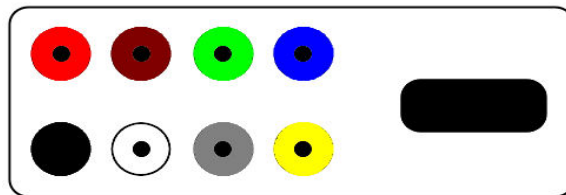


Where to connect the flat cable:

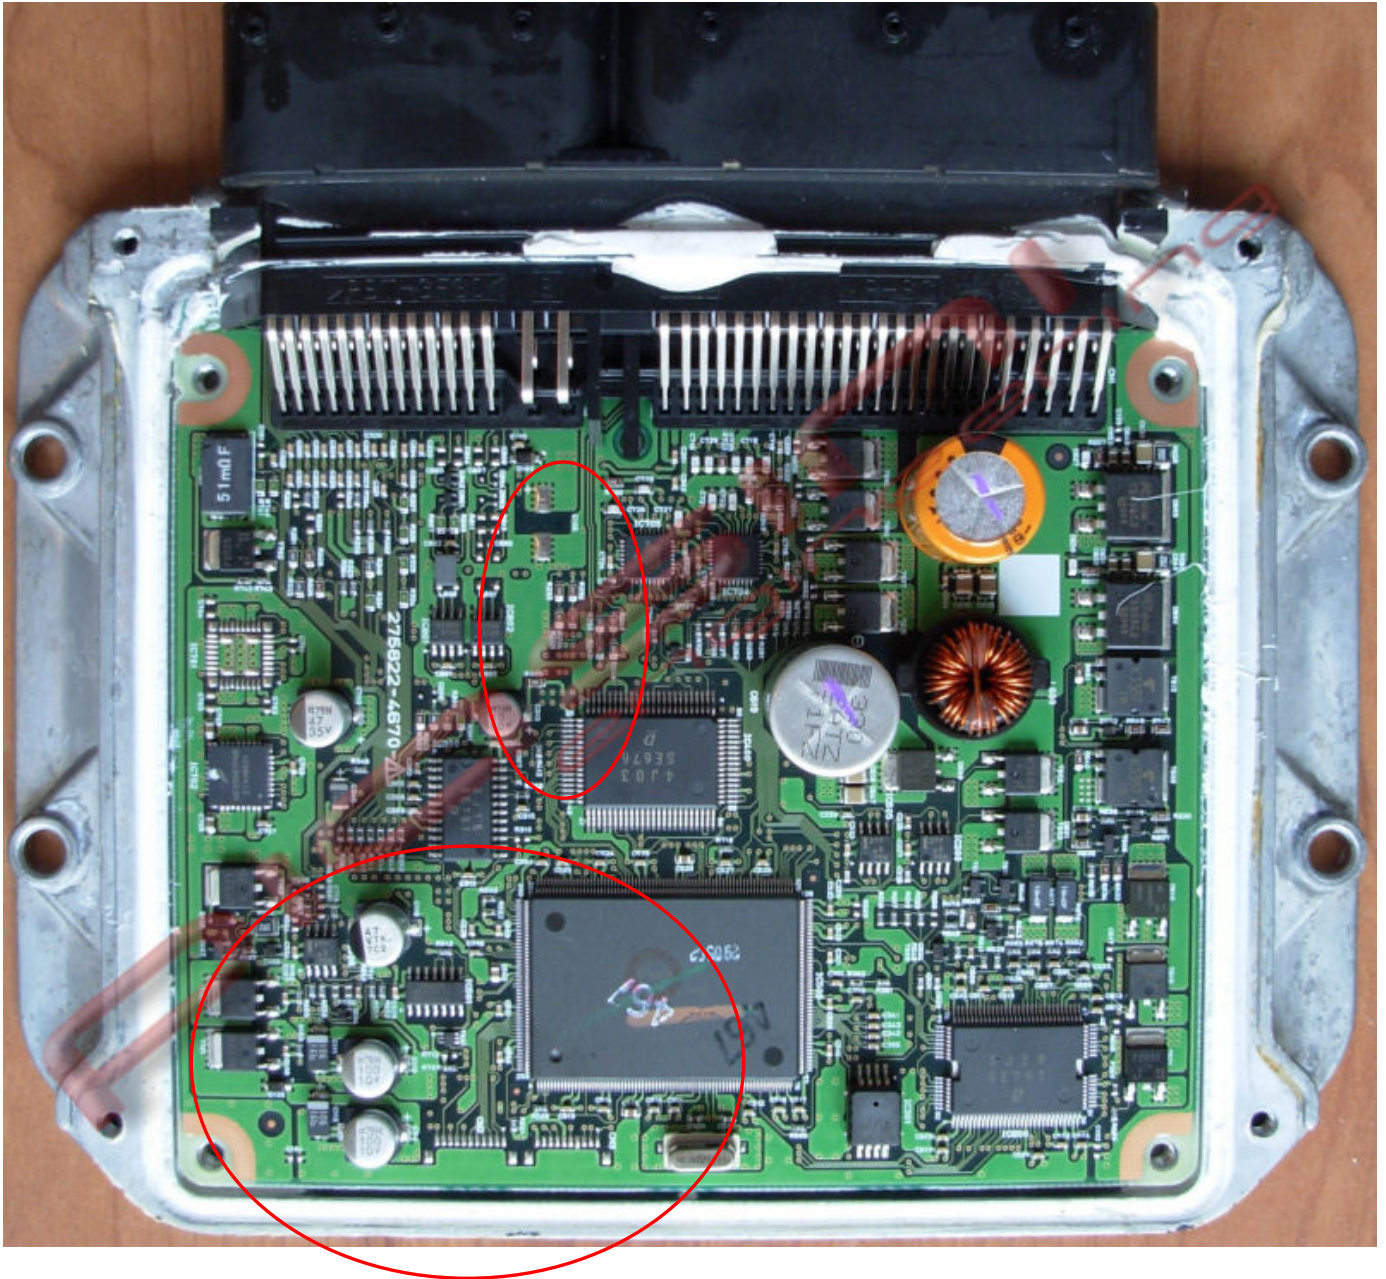

READ the ECU:

Picture 1

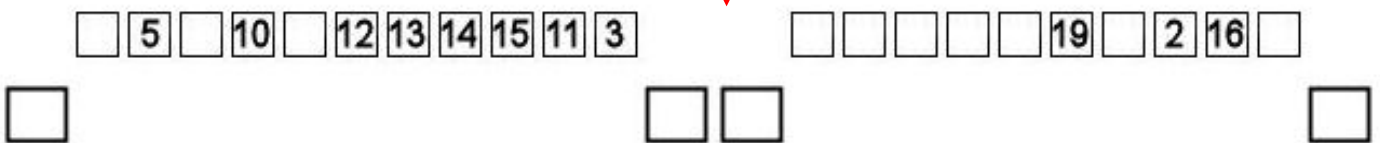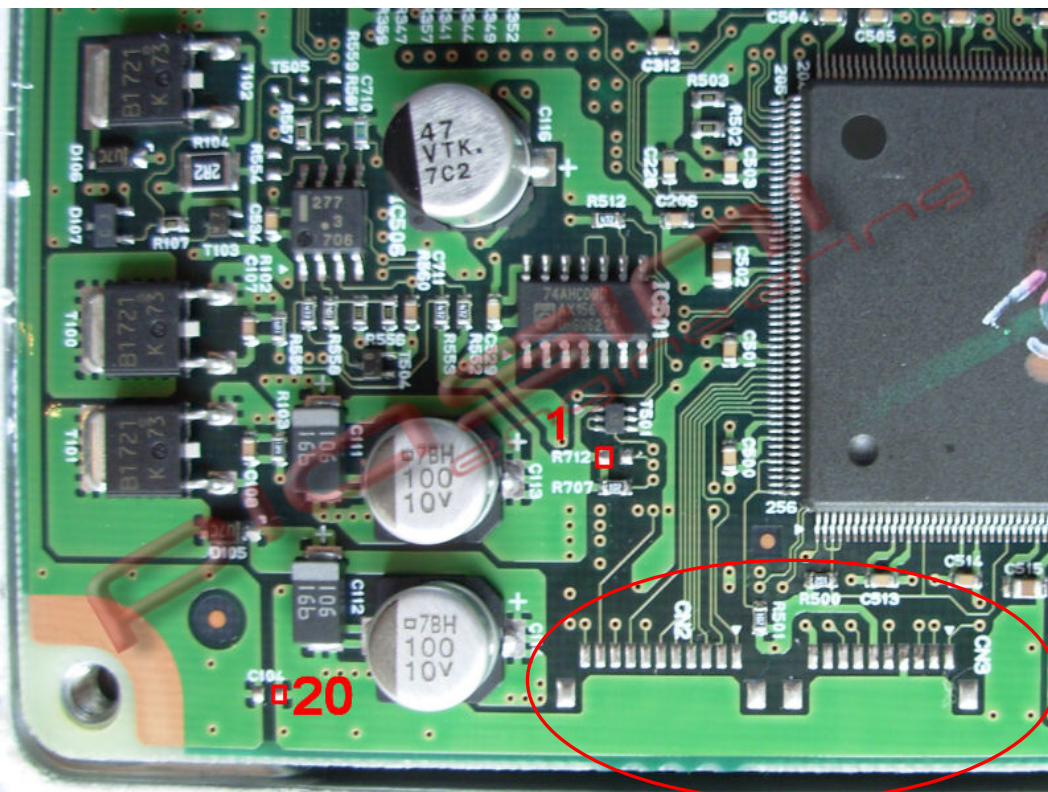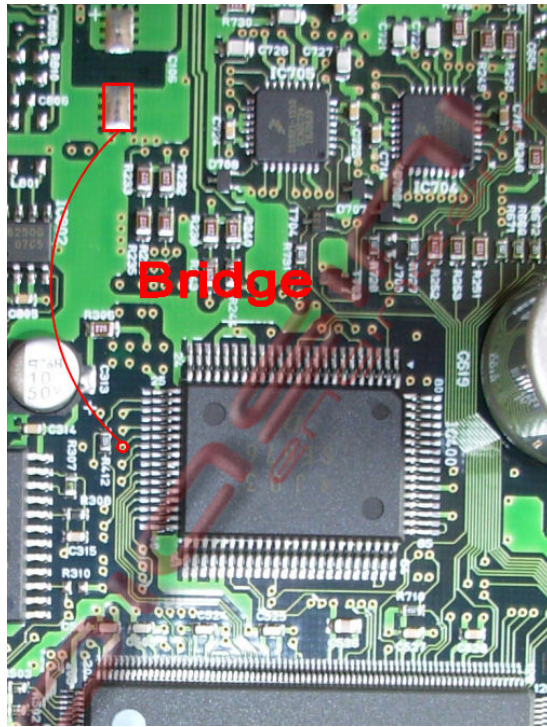

1. You have to put 1 wire (bridge) like in the picture (picture 1).
2. Connet the flat cable following the number in the picture;

WRITE the ECU:

You have to **remove 1 bridge used before** (picture 1), put other 2 wire(bridge) like in the picture, the **flat cable is still connect**.

